



Door Bottom

Automatic Door Bottom

Guaranteed quality since 1918

430 – *Sponge Neoprene Insert/Pile Seal*




Min. size 24"

Max. size 48"

Max. drop $\frac{3}{4}$ "

Can be cut to
exact size.

36", 42" and 48"
can be trimmed up to
3". Other sizes can be
trimmed up to 1".

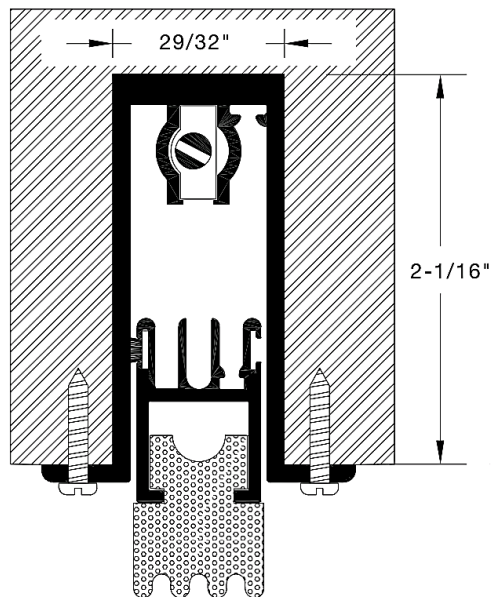

Job:

Prepared For:

Prepared By:

Date:

Remarks:

Finishes:

A - Aluminum Mill Finish

***Mortise door to $31\frac{3}{32}$ " wide and $2\frac{3}{32}$ " deep. This allows door bottom to fit without pinching the case and causing malfunction.**

Note: Door bottoms are not designed to seal directly on carpet. For best results door bottoms should seal on a solid surface. The solid surface should be positioned above the level of the floor covering on either side of the door. Door bottoms are field reversible and can be used in semi-mortised applications.