Box 459 – Rosemount, MN 55068
Phone: 800-328-0953

Self-Adjusting
Magnetic Astragal
195

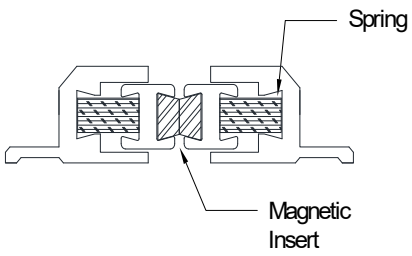

This weather strip is designed to fill the space between double doors.

1. Leave magnetic astragal assembled and trim any excess necessary from the bottom end. ***NOTE: The correct end to trim is the end opposite the red label. DO NOT TRIM THE END WITH THE RED LABEL.***
2. Reese Perfec-Seal Magnetic Astragal permit doors to automatically seal themselves against weather and dust without adjustment or maintenance.
3. The minimum space between housings is 3/8” and the maximum space is ½” between housings. The nominal space to aim for is 7/16” between housings.

Positive Pressure Tested Gasketing Materials for Fire Doors. Intended for Application to/ with listed steel frames and/or classified steel covered composite, hollow metal type fire doors rated up to 3 hours, wood and plastic covered composite type fire doors rated up to 1-1/2 hours, and wood core type fire doors rated up to 20 minutes. Meets UL10B, UL10C and CAN4-S104-2010 Category J .17L5 9903