




Box 459 - Rosemount, MN 55068

Phone 800-328-0953

Fax 800-334-8823

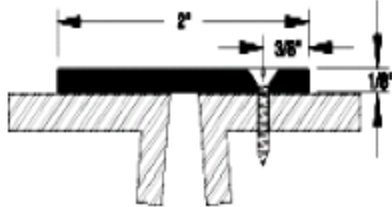

Astragal

Part # 183, 183SP, 183SS

This weather strip is designed to fill the space between double doors.

1. Measure the height of the door and cut the piece of astragal to equal the height.

2. Fasten the astragal to the face of the active door with the astragal overlapping the spacing between the doors so as not to interfere with self-closing devices, locks or other door hardware.

3. Operate the door several times to ensure the gasketing material is adjusted properly so as not to inhibit the door from self-closing and latching.



Positive Pressure Tested Gasketing Materials for Fire Doors. Intended for Application to/with listed steel frames and/or classified steel covered composite, hollow metal type fire doors rated up to 3 hours, wood and plastic covered composite type fire doors rated up to 1-1/2 hours, and wood core type fire doors rated up to 20 minutes.

Meets UL10B, UL10C

Category J.

Meets CAN4-S104-2010

17L5

9903